

Wall Expansion Joint Profile

Product Information

Product Model	JWS
Product Type	Wall Expansion Joint Cover/Seismic Profile
Material	Aluminum Alloy 6063 T6
Finish	Mill finish

The JWS Seismic Expansion Joint Cover is crafted to offer a smooth and visually appealing resolution for seismic expansion joints. Highlighting an aluminum center plate that can be powder-coated to harmonize with your preferred wall finish, it enriches the overall aesthetics of your space. Moreover, the incorporation of rubber gaskets ensures a smooth connection with the walls, preventing any scratches during movement.

Features and Benefits



Seismic Movement Capability
Designed to accommodate horizontal and vertical movements caused by seismic activity.



Durable Construction
Made from high-strength aluminum alloy for exceptional durability and long service life.



Easy Installation
Quick and hassle-free installation process with clear instructions provided.




Versatile Weather Endurance
Engineered with corrosion-resistant properties, this expansion joint cover is well-suited for indoor and outdoor applications.

Maintenance

- > Regularly inspect the expansion joint cover for signs of damage or wear.
- > Clean with mild soap and water as needed to maintain appearance.

Code	Gap width A(mm)	Visible width B(mm)	Total movement (mm)
JWS 100	100	315	130mm (+80 -50)
JWS 150	150	365	180mm (+80 -100)
JWS 200	200	415	230mm (+80 -150)
JWS 250	250	465	280mm (+80 -200)
JWS 300	300	515	330mm (+80 -250)
JWS 400	400	615	430mm (+80 -350)

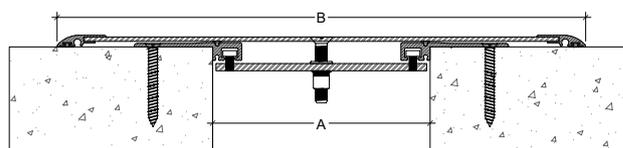

Length	Standard length: 3 meters.
Fire Rating	ASTM E84 Class A.
Installation	Please follow the installation instructions provided in the J-CAP installation guide.