

Floor - Wall Expansion Joint Profile

Product Information

Product Model	NZB-D
Product Type	Floor - Wall Expansion Joint Cover
Material	Aluminum Alloy 6063 T6, EPDM Rubber Gaskets
Finish	Mill finish
Gasket colors	Black, Grey, Beige

Features and Benefits



Durable Aluminum Brackets
Ensures long-lasting performance and structural integrity.



EPDM Rubber insert
Provides excellent flexibility, allowing the profile to adapt to varying conditions without cracking or deteriorating.



Weather-Resistant
Suitable for outdoor applications, as it can withstand extreme temperatures, UV exposure, and moisture, preventing corrosion and decay. For outdoor use, a water barrier must be incorporated to ensure optimal performance.



Easy Installation:
Simplifies the installation process, saving time and labor costs.



Versatile Applications
Suitable for a wide range of applications in construction.




Low Maintenance
Requires minimal upkeep, reducing ongoing operational costs and maintenance efforts.

Maintenance

- Regularly inspect the expansion joint cover for signs of damage or wear.
- Clean with mild soap and water as needed to maintain appearance.

Code	Gap width A(mm)	Visible width B(mm)	Installation Height C(mm)	Installation Width D(mm)	Total Movement (mm)	Load Capacity
NZB 25D	25	31	40	73	10mm (+5 -5)	Pedestrian
NZB 35D	35	41	40	83	14mm (+7 -7)	Pedestrian
NZB 50D	50	56	40	98	20mm (+10 -10)	Pedestrian
NZB 75D	75	81.5	40	123	30mm (+15 -15)	Pedestrian

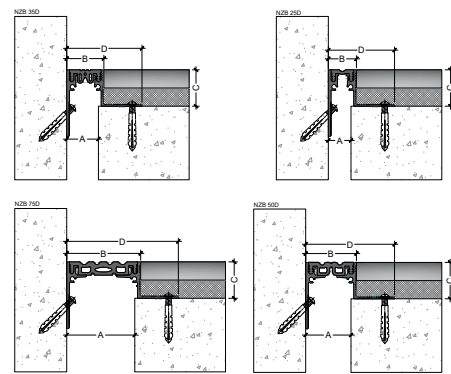

Length	Standard length: 3 meters.
Fire Rating	ASTM E84 Class A.
Installation	Please follow the installation instructions provided in the J-CAP installation guide.