

Wall (Corner) Expansion Joint Profile

Product Information

Product Model	SYRR-C
Product Type	Wall-Wall (Corner) Expansion Joint Cover/Pan Seismic Profile
Material	Aluminum Alloy 6063 T6, EPDM Rubber Gaskets
Finish	Mill finish
Gasket colors	Black, Grey, Beige

SYRR-C Seismic Expansion Joint Cover is designed to provide a seamless and aesthetically pleasing solution for seismic expansion joints. This unique profile perfectly complements the SZP-C floor seismic profile, ensuring a cohesive and harmonious appearance. It features an aluminum center plate that can be powder-coated to match your desired wall finish, enhancing the overall aesthetics of your space.

Features and Benefits



Seismic Movement Capability
Designed to accommodate horizontal and vertical movements caused by seismic activity.



Durable Construction
Made from high-strength aluminum alloy for exceptional durability and long service life.



Streamlined Aesthetics
The low-profile design, coupled with multiple gasket color options, seamlessly enhances aesthetics while preserving functionality.



Easy Installation
Quick and hassle-free installation process with clear instructions provided.





Versatile Weather Endurance
Engineered with corrosion-resistant properties, this expansion joint cover is well-suited for indoor and outdoor applications.

Maintenance

- > Regularly inspect the expansion joint cover for signs of damage or wear.
- > Clean with mild soap and water as needed to maintain appearance.

Code	Gap width A(mm)	Visible width B(mm)	Installation height C(mm)	Installation width E(mm)	Total movement (mm)	Seismic movement (mm)
SYRR 50C	50	172	25	197	40mm (+20 -20)	95mm (+50 -45)
SYRR 100C	100	222	25	247	40mm (+20 -20)	115mm (+60 -55)
SYRR 150C	150	272	25	297	40mm (+20 -20)	165mm (+60 -105)
SYRR 200C	200	322	25	347	40mm (+20 -20)	215mm (+60 -155)
SYRR 250C	250	372	25	397	40mm (+20 -20)	265mm (+60 -205)
SYRR 300C	300	422	25	447	40mm (+20 -20)	315mm (+60 -255)
SYRR 400C	400	522	25	547	40mm (+20 -20)	415mm (+60 -355)

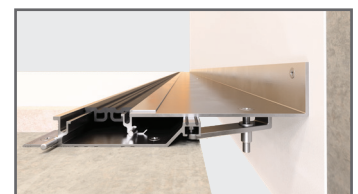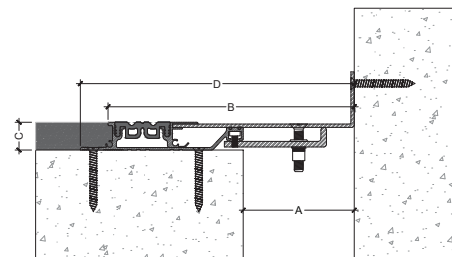

Length Standard length: 3 meters.

Fire Rating ASTM E84 Class A.

Installation Please follow the installation instructions provided in the J-CAP installation guide.