







Wall - Corner Expansion Joint

Product Information

| | |
|----------------------|---|
| Product Model | WZB-D |
| Product Type | Wall - Corner Expansion Joint Cover |
| Material | Aluminum Alloy 6063 T6, EPDM Rubber Gaskets |
| Finish | Mill finish |
| Gasket colors | Black, Grey, Beige |


Features and Benefits

- 
Durable Aluminum Brackets
 Ensures long-lasting performance and structural integrity.
- 
EPDM Rubber insert
 Provides excellent flexibility, allowing the profile to adapt to varying conditions without cracking or deteriorating.
- 
Weather-Resistant:
 Suitable for outdoor applications, as it can withstand extreme temperatures, UV exposure, and moisture, preventing corrosion and decay. For outdoor use, a water barrier must be incorporated to ensure optimal performance.
- 
Easy Installation:
 Simplifies the installation process, saving time and labor costs.
- 
Versatile Applications
 Suitable for a wide range of applications in construction.
- 
Low Maintenance
 Requires minimal upkeep, reducing ongoing operational costs and maintenance efforts.

Maintenance

- > Regularly inspect the expansion joint cover for signs of damage or wear.
- > Clean with mild soap and water as needed to maintain appearance.

| Code | Gap width A(mm) | Visible width B(mm) | Installation height C(mm) | Installation width D(mm) | Total movement (mm) |
|---------|-----------------|---------------------|---------------------------|--------------------------|---------------------|
| WZB 50D | 50 | 56 | 18 | 105 | 20mm (+10 -10) |
| WZB 75D | 75 | 81 | 18 | 130 | 30mm (+15 -15) |

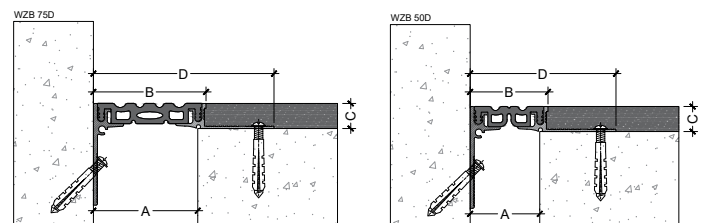

Length Standard length: 3 meters.

Fire Rating ASTM E84 Class A.

Installation Please follow the installation instructions provided in the J-CAP installation guide.