

Wall Expansion Joint Profile

Product Information

| | |
|----------------------|---|
| Product Model | WZB |
| Product Type | Wall Expansion Joint Cover |
| Material | Aluminum Alloy 6063 T6, EPDM Rubber Gaskets |
| Finish | Mill finish |
| Gasket colors | Black, Grey, Beige |

Features and Benefits



Durable Aluminum Brackets
Ensures long-lasting performance and structural integrity.



EPDM Rubber insert
Provides excellent flexibility, allowing the profile to adapt to varying conditions without cracking or deteriorating.



Weather-Resistant:
Suitable for outdoor applications, as it can withstand extreme temperatures, UV exposure, and moisture, preventing corrosion and decay. For outdoor use, a water barrier must be incorporated to ensure optimal performance.



Easy Installation:
Simplifies the installation process, saving time and labor costs.



Versatile Applications
Suitable for a wide range of applications in construction.






Low Maintenance
Requires minimal upkeep, reducing ongoing operational costs and maintenance efforts.

Maintenance

- Regularly inspect the expansion joint cover for signs of damage or wear.
- Clean with mild soap and water as needed to maintain appearance.

| Code | Gap width A(mm) | Visible width B(mm) | Installation height C(mm) | Installation width D(mm) | Total movement (mm) |
|--------|-----------------|---------------------|---------------------------|--------------------------|---------------------|
| WZB 25 | 25 | 31 | 18 | 129 | 10mm (+5 -5) |
| WZB 35 | 35 | 41 | 18 | 139 | 14mm (+7 -7) |
| WZB 50 | 50 | 56 | 18 | 154 | 20mm (+10 -10) |
| WZB 75 | 75 | 81 | 18 | 179 | 30mm (+15 -15) |

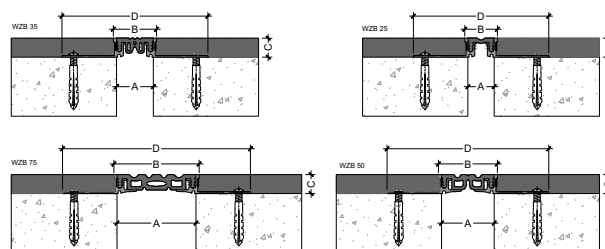

Length Standard length: 3 meters.

Fire Rating ASTM E84 Class A.

Installation Please follow the installation instructions provided in the J-CAP installation guide.