

# Wall Expansion Joint Profile

## Product Information

<b>Product Model</b>	WSL
<b>Product Type</b>	Wall Expansion Joint Cover
<b>Material</b>	Aluminum Alloy 6063 T6
<b>Finish</b>	Mill finish

The WSL Wall-to-Wall Expansion Profile is a versatile solution meticulously crafted to effectively cover expansion joints in diverse applications. This innovative design incorporates two precision-engineered rubber gaskets, ensuring a seamless, scratch-free connection for the center plate.

## Features and Benefits



**Versatile Design**  
Suitable for various expansion joint applications.



**Easy Assembly**  
Simple setup with cover plate and upper profiles.



**Customizable**  
Available in various sizes to accommodate different expansion joint dimensions.



**Durable**  
Constructed from high-quality materials for long-lasting performance.




**Corrosion Resistance**  
Resistant to rust and corrosion.

## Maintenance

- > Regularly inspect the expansion joint cover for signs of damage or wear.
- > Clean with mild soap and water as needed to maintain appearance.

Code	Gap width A(mm)	Visible width B(mm)	Installation height C(mm)	Total Movement
WSL 25	25	135	18	45mm (+30 -15)
WSL 35	35	145	18	55mm (+30 -25)
WSL 50	50	160	18	80mm (+40 -40)
WSL 75	75	185	18	80mm (+40 -40)
WSL 100	100	263	18	130mm (+65 -65)
WSL 150	150	313	18	130mm (+65 -65)
WSL 200	200	363	18	130mm (+65 -65)
WSL 250	250	413	18	130mm (+65 -65)

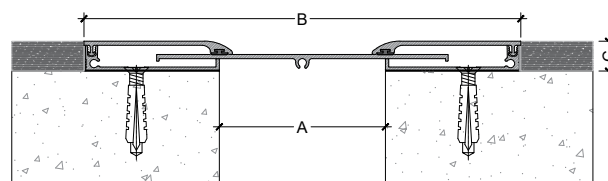

<b>Length</b>	Standard length: 3 meters.
<b>Fire Rating</b>	ASTM E84 Class A.
<b>Installation</b>	Please follow the installation instructions provided in the J-CAP installation guide.